

## 6-EVF-100

#### **EVF SERIES BATTERY**

### [ FEATURES ]

- 1. The grid is made of lead-calcium alloy, it doesn't contain cadmium which is harmful to the environment and human body.
- 2. It adopts special lead paste technology so that batteries are under good deep cycle discharge performance.
- 3. Using special electrolyte additives and separators of high adsorption capacity, the battery shows excellent high-current discharge performance. There are obvious advantages in vehicle starting and climbing.
- 4. It adopts high-strength ABS engineering plastic shell, make it high impact resistance.
- 5. Sealed and maintenance-free technology, the battery does not need to add acid and hydration during use, Safe and reliable.

#### APPLICATIONS

- 1. Golf carts/Tourist cars
- 2. Electric Bike/ Patrol cars
- 3. Electric vehicles, tractor, various power tools



#### [ SPECIFICATIONS ]


MODEL	3hr CAPACITY (Ah)	5hr CAPACITY (Ah)	20hr CAPACITY (Ah)	VOLTAGE		DIMENSION			GROSS WEIGHT	TERMINALS
				(V)	LENGTH	WIDTH	HEIGHT	TOTAL HEIGHT	(Kg)	DIMENSION
6-EVF-100	100	115	147	12	332	174	216	224	35	M8* Ф20 *5

## [:?8|>@E>G|F:<;L|<]

: ?8I >@ > JK <g< th=""><th>: ?8I &gt;@ &gt; D <k? f;<="" th=""><th>LII<ek (A)</ek </th><th>MF (K8&gt;&lt; (V)</th><th>K@ &lt; (h)</th><th>KI8EJ=<i :FE;@K@FE</i </th></k?></th></g<>	: ?8I >@ > D <k? f;<="" th=""><th>LII<ek (A)</ek </th><th>MF (K8&gt;&lt; (V)</th><th>K@ &lt; (h)</th><th>KI8EJ=<i :FE;@K@FE</i </th></k?>	LII <ek (A)</ek 	MF (K8>< (V)	K@ < (h)	KI8EJ= <i :FE;@K@FE</i 	
G? 8J<'(	Constant Current	5	12	≦1	Voltage up to 12V or Charging time up to 1H	
G? 8J < ')	Constant Current	15	14.7	≦6	Voltage up to 14.7V or Charging time up to 6H	
G? 8J < '*	Constant Current	10	14.9	≦2	Voltage up to 14.9V or Charging time up to 2H	
G? 8J < +	Constant Voltage	5	14.9	≦2	Voltage up to 14.9V or Charging time up to 2H	
G? 8J<',	Constant Voltage	1.0	16.02	≦2	Charging time up to 2H	
G? 8J <'-	Constant Voltage	1.0	13.8	≦4	Charging time up to 4H	

Note: The charging voltage values listed in the table are the voltages of a single battery at a standard temperature of 25  $^{\circ}$  C The temperature compensation coefficient is  $\pm 3 mV/^{\circ} C$ 

## [ CHARGING CHARACTERISTICS ]

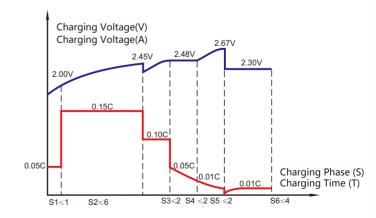






# 6-EVF-100


#### **EVF SERIES BATTERY**

## [ LIFESPAN CURVES ]

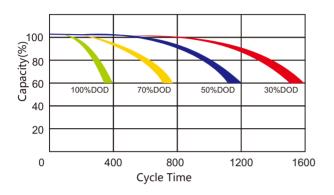



## [ DISCHARGE CHARACTERISTICS ]


Discharge curves at different temperatures

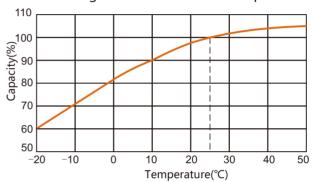

## [ DIMENSION ]

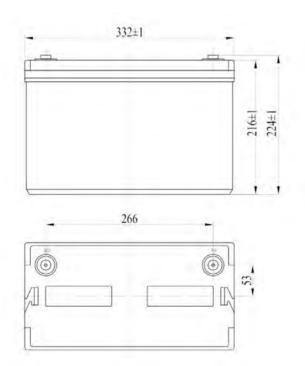





M8

Battery Dimension terminal size