



LIVEN LVG Series-GEL

- Long discharge time. Up to 12 years.
- Suitable for standby power and energy storage power use
- Special plate design, long cycle lifetime
- Using special lead-calcium alloy to boost up the grid anti-corrosive performance and extend the battery using lifetime
- Special separator to boost up the battery inter-internal performance
- High thermal capacity, reduce the risk of thermal runaway and drying up, can be used in poor environment
- High gas recombination efficiency
- Little water losing, no electrolyte stratification phenomenon
- Long storage time
- Good deep discharge resilience performance
- Using nano-fumed silica, with small particle size, and big specific surface area.

Application:

- Telecommunication backup
- Power plants
- Medical equipments
- Uninterrupted power supplies
- Elevators emergency
- Wheelchairs
- Railway and marine systems
- Electric tools
- Golf trolleys and golf cart
- Solar and wind mill units





Specification:

Nominal Voltage	12V
Nominal Capacity(20HR)	85.0AH
Dimension	Length 305±3mm (12.01 inches)
	Width 168±2mm (6.61 inches)
	Container Height 207±3mm (8.15 inches)
	Total Height (with Terminal) 213±3mm (8.38 inches)
Approx Weight	Approx 26.7 kg (59.8lbs)
Terminal	T6
Container Material	ABS
Max. Discharge Current	850A (5s)
Internal Resistance	Approx 6.0mΩ
Operating Temp. Range	Discharge : -20~55°C (-4~131°F)
	Charge : 0~40°C (32~104°F)
Nominal Operating Temp. Range	Storage : -20~50°C (-4~122°F)
	25±3°C (77±5°F)
Cycle Use	Initial Charging Current less than 17A. Voltage
	14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C
Standby Use	No limit on Initial Charging Current Voltage
	13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C
Capacity affected by Temperature	40°C (104°F) 103%
	25°C (77°F) 100%
	0°C (32°F) 86%
Self Discharge	LIVEN LVG series batteries may be stored for up to 9 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.


Outer Dimensions:

T6 Terminal


Unit: mm [inches]

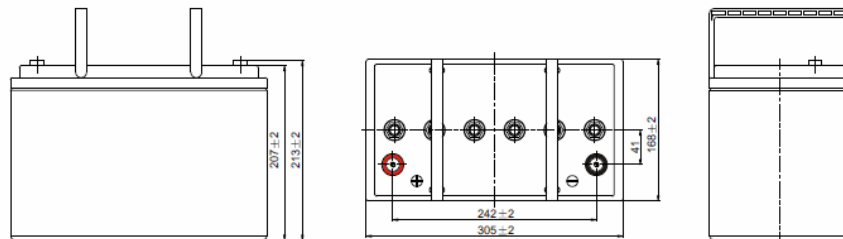


Discharge Characteristics

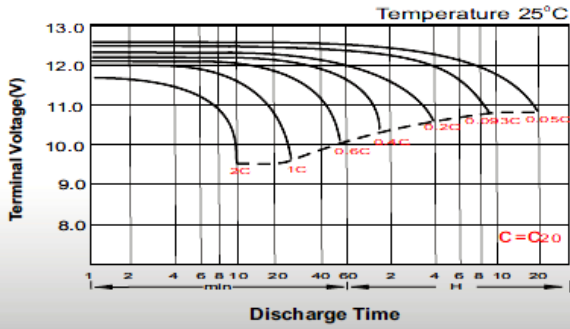


Float Charging Characteristics

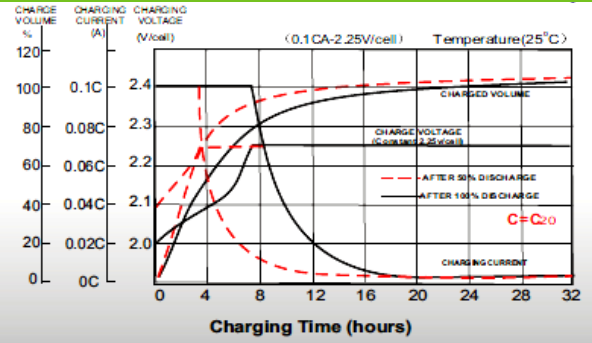


Temperature Effects in Relation to Capacity

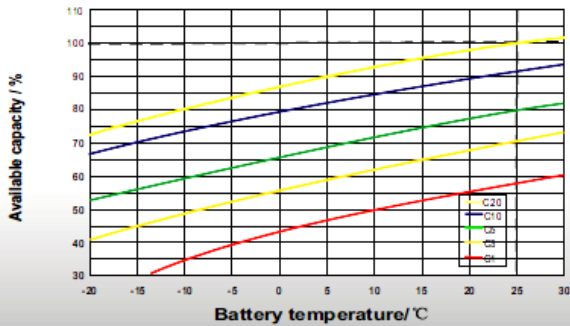


Effect of Temperature on Long Term Float Life

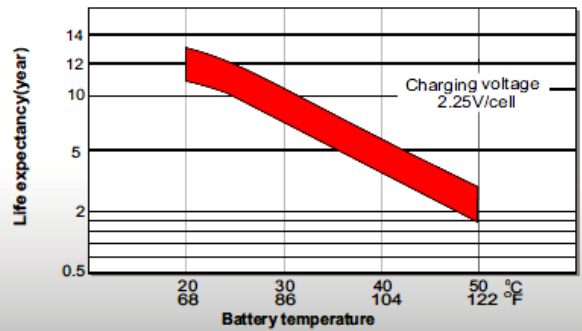

Cycle Life in Relation to Depth of Discharge

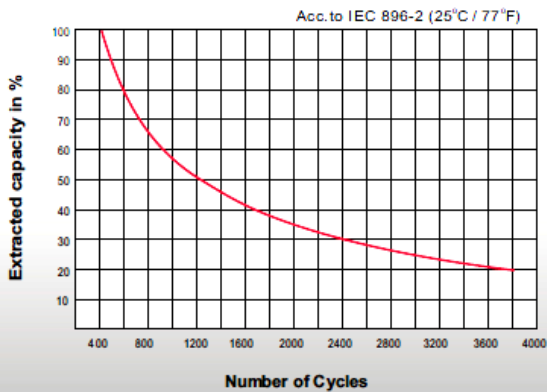

Effect of Temperature on Long Term Float Life

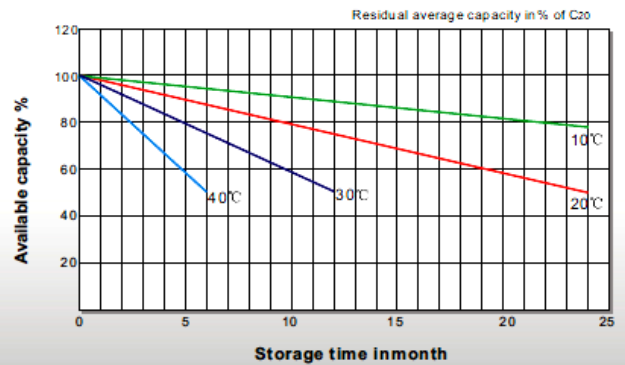

Constant Current Discharge (CC, Unit: A) at 25°C (77°F)

F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	71.9	56.4	43.1	36.0	22.9	17.4	14.4	12.5	10.8	9.52	8.59	7.85	7.32	4.08
1.80V/cell	82.4	63.1	47.5	39.8	24.7	18.7	15.3	13.1	11.3	10.0	9.00	8.25	7.64	4.25
1.75V/cell	92.6	69.4	51.3	42.6	26.2	19.7	16.0	13.6	11.7	10.3	9.29	8.50	7.80	4.34
1.70V/cell	99.7	74.3	54.5	45.1	27.8	20.5	16.6	14.0	12.1	10.7	9.56	8.73	7.98	4.39
1.67V/cell	103.8	77.2	56.4	46.8	28.5	21.2	17.0	14.3	12.3	10.8	9.71	8.84	8.07	4.43
1.60V/cell	112.5	82.6	60.6	49.6	29.7	22.0	17.6	14.8	12.6	11.1	9.88	9.03	8.23	4.50

Constant Power Discharge (CP, Unit: W) at 25°C (77°F)

F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	137.6	108.8	83.5	70.2	44.7	34.1	28.4	24.6	21.3	18.9	17.1	15.6	14.6	8.14
1.80V/cell	155.6	120.4	91.4	77.1	48.1	36.4	30.0	25.7	22.3	19.7	17.9	16.4	15.2	8.47
1.75V/cell	172.9	131.2	98.1	82.1	50.8	38.4	31.3	26.7	23.0	20.4	18.4	16.9	15.5	8.63
1.70V/cell	184.3	139.3	103.4	86.3	53.6	39.9	32.2	27.4	23.8	21.0	18.9	17.3	15.8	8.73
1.67V/cell	189.6	143.2	106.3	89.1	54.8	41.0	32.9	27.9	24.1	21.3	19.2	17.5	16.0	8.81
1.60V/cell	203.2	151.9	113.4	94.1	56.7	42.4	34.1	28.7	24.6	21.7	19.4	17.8	16.3	8.92