

UP3.5-4



Specification		
Nominal Voltage	4V	
Nominal Capacity (20HR)	3.5AH	
Dimension	Length	90±1mm (3.54 inches)
	Width	34±1mm (1.34 inches)
	Container Height	59±1mm (2.32 inches)
	Total Height (with Terminal)	65±1mm (2.56 inches)
Approx Weight	Approx 0.42 kg (0.93lbs)	
Terminal	T1	
Container Material	ABS	
Rated Capacity	3.50 AH/0.175A	(20hr, 1.80V/cell, 25°C/77°F)
	3.26 AH/0.326A	(10hr, 1.80V/cell, 25°C/77°F)
	3.00 AH/0.60A	(5hr, 1.75V/cell, 25°C/77°F)
	2.67 AH/0.89A	(3hr, 1.75V/cell, 25°C/77°F)
	2.20 AH/2.20A	(1hr, 1.60V/cell, 25°C/77°F)
Max. Discharge Current	52.5A (5s)	
Internal Resistance	Approx 14mΩ	
Operating Temperature Range	Discharge: -15~50°C (5~122°F)	
	Change : 0~40°C (32~104°F)	
	Storage : -15~40°C (5~104°F)	
Nominal Operating Temperature Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 1.05A. Voltage. 4.8V~5.0V at 25°C (77°F) Temp. Coefficient -10mV/°C	
Standby Use	No limit on Initial Charging Current Voltage. 4.5V~4.6V at 25°C (77°F) Temp. Coefficient -6mV/°C	
Capacity affected by Temperature	40°C (104°F) 103%	
	25°C (77°F) 100%	
	0°C (32°F) 86%	
Self Discharge	Batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required.	

Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	6.67	5.12	4.24	3.67	2.83	2.09	1.76	1.04	0.81	0.66	0.54	0.47	0.378	0.316	0.173
1.80V/cell	8.90	6.54	5.12	4.33	3.34	2.43	1.97	1.14	0.88	0.71	0.58	0.50	0.401	0.326	0.175
1.75V/cell	10.1	7.19	5.6	4.66	3.47	2.52	2.06	1.18	0.89	0.72	0.60	0.52	0.408	0.334	0.177
1.70V/cell	11.1	7.83	5.97	4.9	3.61	2.62	2.13	1.21	0.92	0.74	0.61	0.53	0.413	0.341	0.180
1.65V/cell	12.2	8.45	6.35	5.2	3.81	2.69	2.18	1.23	0.96	0.77	0.63	0.54	0.42	0.348	0.182
1.60V/cell	13.5	9.20	6.79	5.54	4.03	2.80	2.20	1.28	0.99	0.79	0.65	0.55	0.424	0.352	0.183


Constant Power Discharge (Watts) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	12.2	9.50	7.91	6.91	5.40	4.01	3.40	2.02	1.59	1.29	1.06	0.92	0.746	0.625	0.343
1.80V/cell	16.2	11.9	9.40	8.05	6.28	4.63	3.78	2.19	1.70	1.37	1.13	0.98	0.789	0.643	0.346
1.75V/cell	17.9	12.9	10.2	8.58	6.46	4.76	3.94	2.26	1.72	1.40	1.16	1.01	0.801	0.660	0.349
1.70V/cell	19.1	13.8	10.7	8.90	6.69	4.93	4.05	2.32	1.77	1.44	1.18	1.03	0.811	0.672	0.355
1.65V/cell	20.8	14.7	11.3	9.40	7.00	5.01	4.11	2.34	1.84	1.48	1.21	1.05	0.822	0.685	0.360
1.60V/cell	22.4	15.6	11.9	9.90	7.34	5.19	4.13	2.42	1.88	1.52	1.25	1.07	0.828	0.691	0.361




UP3.5-4


Dimensions

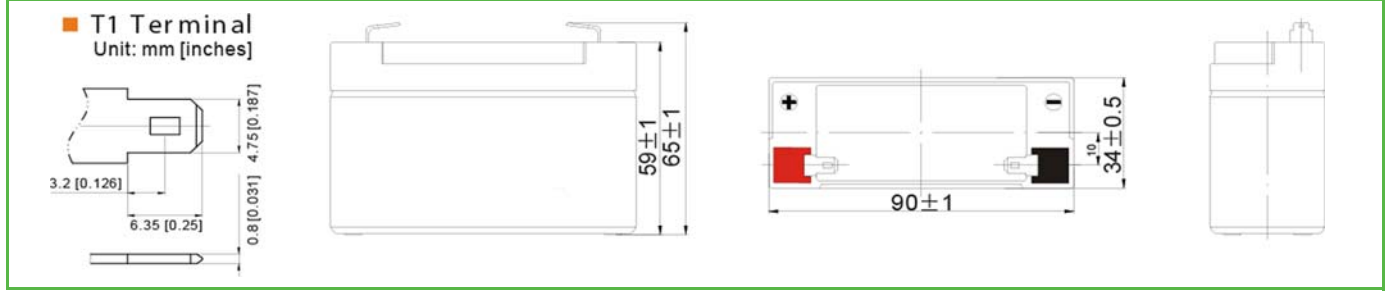


Discharge Characteristics

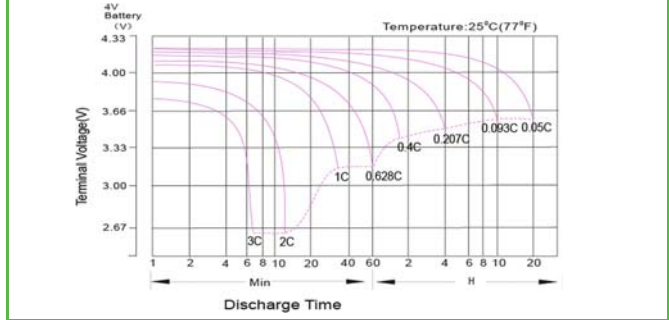


Effect of Temperature on Long Term Float Life

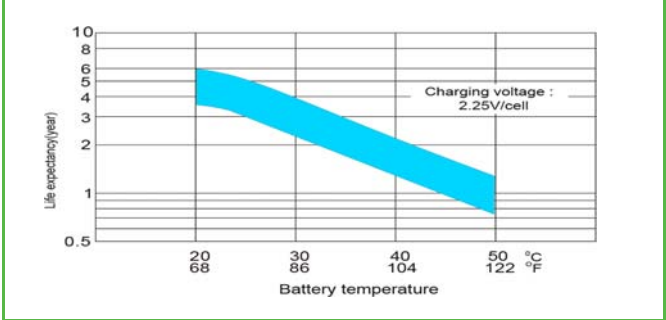


Float Charging Characteristics

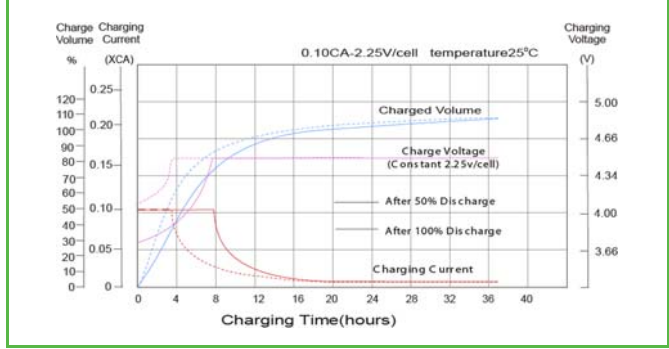

Cycle Life in Relation to Depth of Discharge

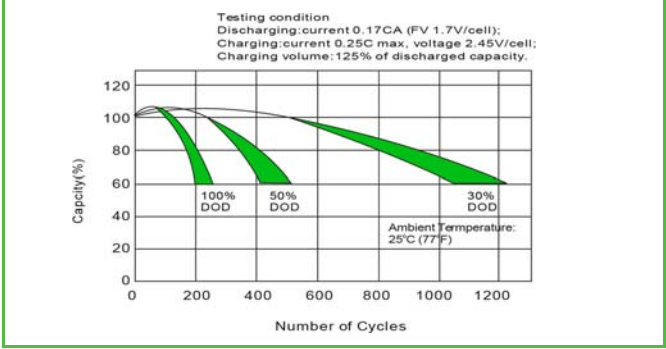

Temperature Effects in Relation to Battery Capacity

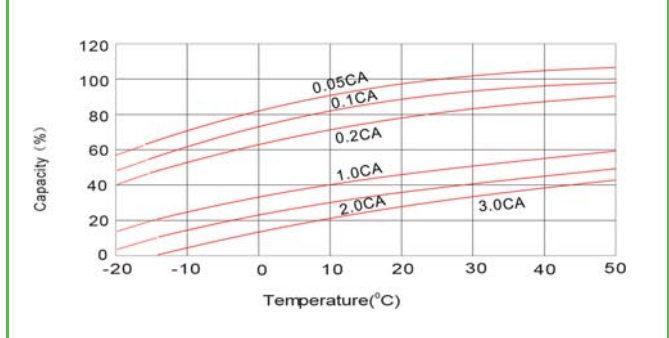

Self Discharge Characteristics

