

LIVEN LVJ Series

LVJ Hybrid Gel series are manufactured with AGM separator (Absorbent Glass Material) and patented Gel electrolyte. The LVJ series Valve Regulated Lead Acid (VRLA) is Hybrid Gel battery with 12 years floating design life. This battery is ideal for standby or frequent cyclic discharge applications.

The number of deep discharge cycles is increase much compared with normal AGM, 400 cycles at 100% DOD.

Application:

- Telecommunications
- Uninterrupted Power Supplies
- Medical equipments
- Solar System
- Wind Power System
- Auto Control System

Dimensions:


Length	350±1.5mm (13.8in)
Width	167±1.5mm (6.57in)
Height	182±1.5mm (7.17in)
Total Height	182±1.5mm (7.17in)



Specification:

Cells Per Unit	6
Voltage Per Unit	12V
Nominal Capacity	80Ah @20hour-rate to 1.75V per cell @25°C
Weight	Approx. 24.0Kg ±2% (52.92lbs)
Internal Resistance	Approx. 5.5mΩ
Terminal	R6.0
Max. Discharge Current	800A (5sec)
Design Life	12 years floating Eurobat (20°C): 10-12 years Long Life
Recommended Maximum Charging Current	24.0A
Standby Use Voltage	13.6V~13.8V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6V~14.8V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Self Discharge	LIVEN Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.

Technical Drawing:

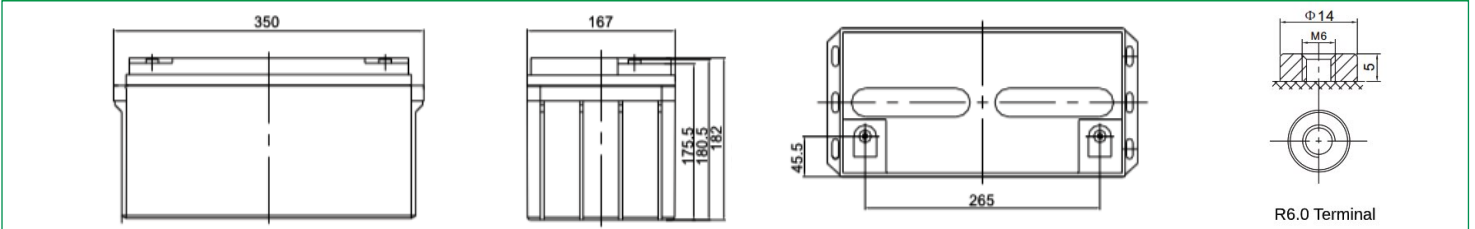


Constant Current Discharge (CC, Unit: A) at 25°C (77°F)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	196.0	146.3	83.9	48.5	28.4	21.1	16.7	14.1	9.63	8.16	4.16
1.65V	189.5	141.9	82.2	47.6	27.9	20.8	16.5	13.9	9.52	8.08	4.12
1.70V	180.9	136.1	79.8	46.4	27.3	20.4	16.2	13.7	9.38	7.97	4.07
1.75V	169.5	128.4	76.7	44.7	26.4	19.8	15.8	13.4	9.18	7.81	4.00
1.80V	154.3	118.0	72.3	42.4	25.2	19.0	15.2	12.9	8.90	7.60	3.90
1.85V	133.5	103.7	66.2	39.2	23.4	17.8	14.3	12.3	8.50	7.29	3.76


Constant Power Discharge (CP, Unit: W/Battery) at 25°C (77°F)

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	1998.0	1536.0	912.0	544.2	322.8	242.4	192.6	163.2	112.8	96.0	49.1
1.65V	1986.0	1518.0	906.0	539.4	319.8	240.0	191.4	162.0	112.2	95.4	48.8
1.70V	1914.0	1470.0	888.0	527.4	313.2	235.8	187.8	159.6	110.4	94.2	48.2
1.75V	1830.0	1410.0	864.0	511.2	304.8	229.8	183.6	156.6	108.0	92.4	47.5
1.80V	1692.0	1314.0	822.0	487.2	292.2	221.4	177.6	151.8	105.0	90.0	46.3
1.85V	1488.0	1170.0	756.0	453.0	273.6	208.2	168.6	144.6	100.8	86.4	44.7


Discharge Characteristics Curve

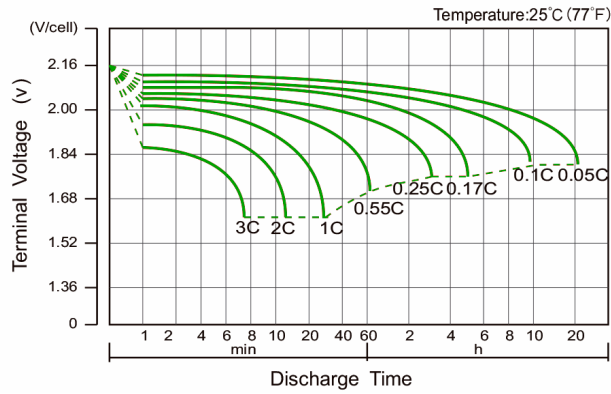


Charge Characteristic Curve For Standby Use

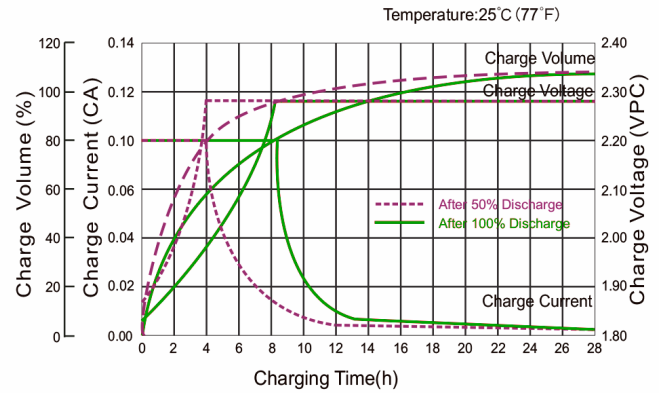


Cycle Life In Relation To Depth Of Discharge

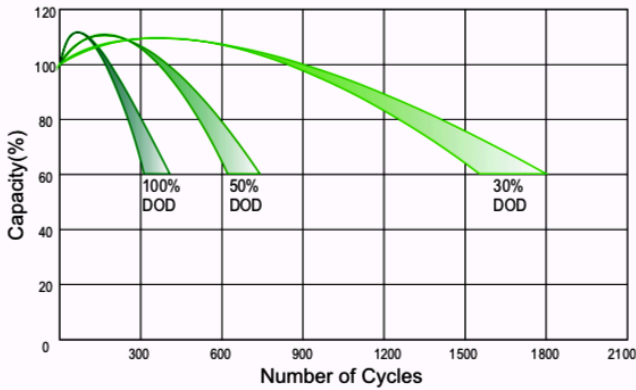


Relationship Between Charging Voltage And Temperature

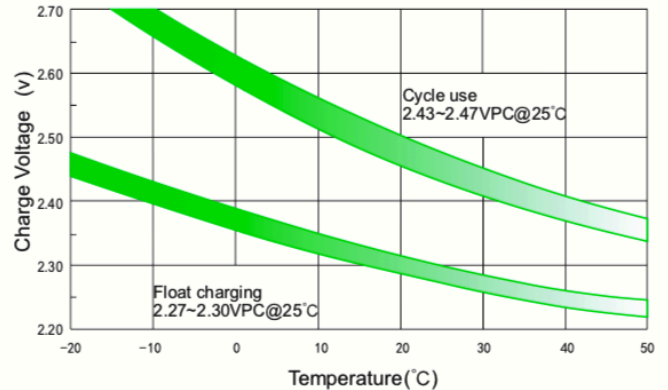


Temperature Effects On Capacity

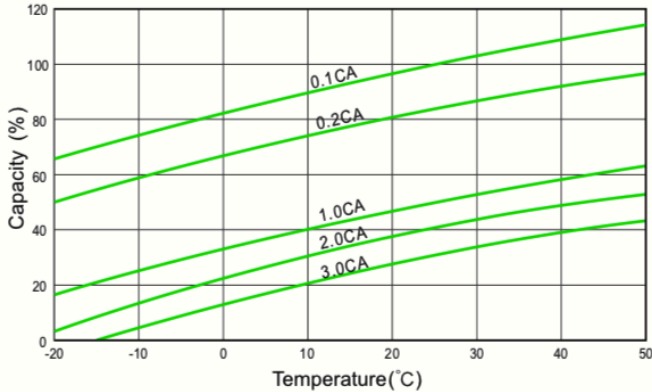


Storage Characteristics

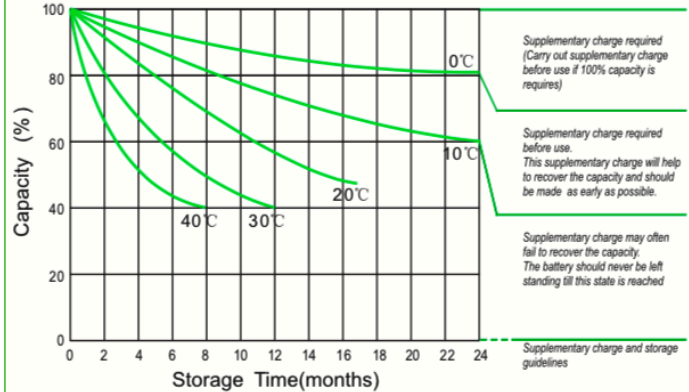

Effect Of Temperature On Long Term Life

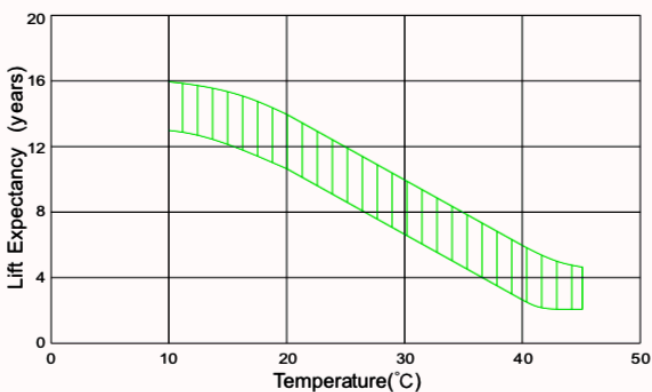

Relationship of OCV and State of Charge (20°C)

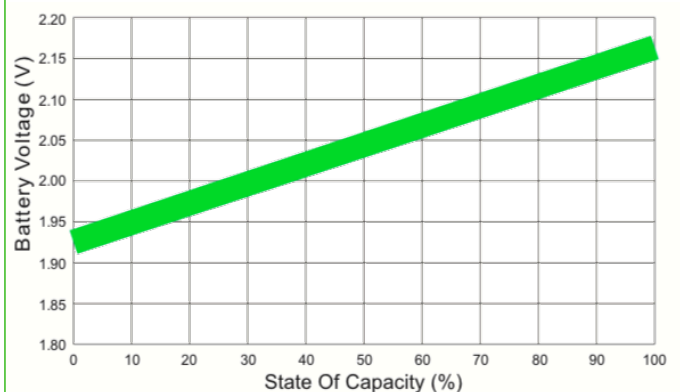

(Note) All above information shall be changed without prior notice. LIVEN Battery reserves the right to explain and update the latest information.