




# SL-550iX Size: 1/2AA

- > Extended temperature range
- > iXtra – long term high performance


### Performance Data

(Typical values for batteries stored at +25 °C for one year)


System	LTC
Nominal voltage	3.6 V
Nominal capacity	0.9 Ah
Nominal current	0.6 mA
Max. continuous discharge current	50 mA
Pulse current capability	100 mA
Anode surface area	6 cm <sup>2</sup>
Lithium content	0.35 g
Weight	9.6 g
Volume	4.3 cm <sup>3</sup>
Temperature range	-55 °C ... +130 °C

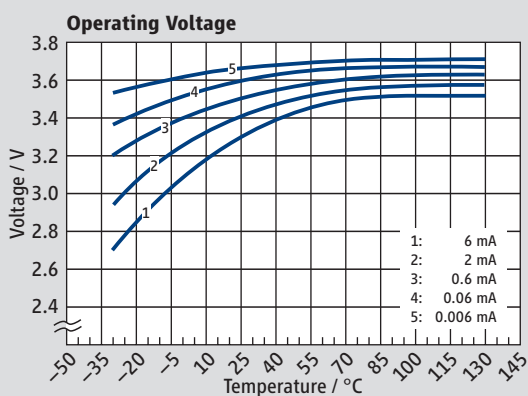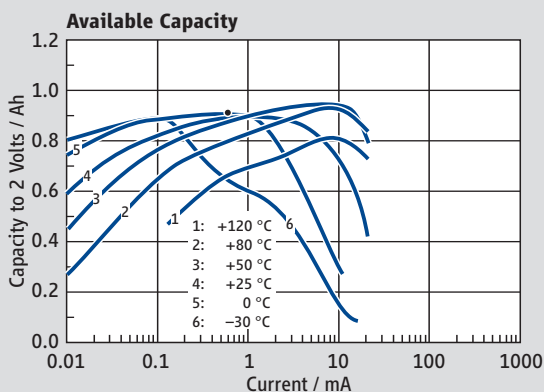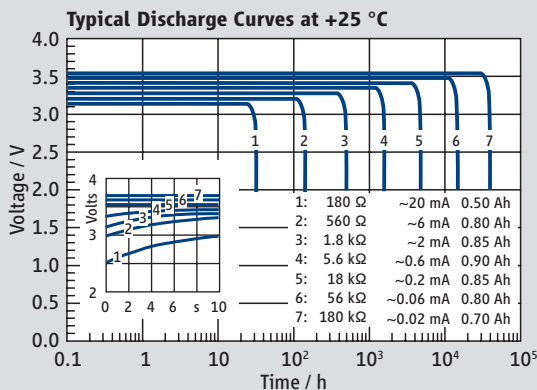


### SL-550iX/S




### SL-550iX/T




### SL-550iX/P

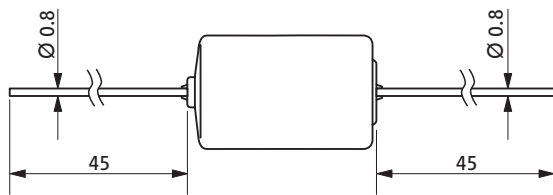

### SL-550iX/PR



### SL-550iX/PT



### Available Terminations

Termination	Standard	Catalogue no.
SL-550iX/S	Standard	11 6 05501 00
SL-550iX/T	Tags	11 6 05502 00
SL-550iX/P	Pins	11 6 05503 00
SL-550iX/PR	Pins radial	11 6 05506 00
SL-550iX/PT	Polarized tags	11 6 05508 00

**WARNING:**  
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 150 °C, incinerate, or expose contents to water.

Any values given here are for informational purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.