

UP2.2-12



Specification	
Nominal Voltage	12V
Nominal Capacity (20HR)	2.2AH
Dimension	Length 178±1mm (7.01 inches)
	Width 35±1mm (1.34 inches)
	Container Height 64±1mm (2.52 inches)
	Total Height (with Terminal) 70±1mm (2.76 inches)
Approx Weight	Approx 0.80 kg (1.76lbs)
Terminal	T1
Container Material	ABS
Rated Capacity	2.20 AH/0.110A (20hr, 1.80V/cell, 25°C/77°F)
	2.05 AH/0.205A (10hr, 1.80V/cell, 25°C/77°F)
	1.85 AH/0.37A (5hr, 1.75V/cell, 25°C/77°F)
	1.68 AH/0.56A (3hr, 1.75V/cell, 25°C/77°F)
	1.38 AH/1.38A (1hr, 1.60V/cell, 25°C/77°F)
Max. Discharge Current	33A (5s)
Internal Resistance	Approx 100mΩ
Operating Temperature Range	Discharge: -15~50°C (5~122°F)
	Change : 0~40°C (32~104°F)
	Storage : -15~40°C (5~104°F)
Nominal Operating Temperature Range	25±3°C (77±5°F)
Cycle Use	Initial Charging Current less than 0.66A.Voltage. 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C
Standby Use	No limit on Initial Charging Current Voltage. 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C
Capacity affected by Temperature	40°C (104°F) 103%
	25°C (77°F) 100%
	0°C (32°F) 86%
Self Discharge	Batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required.


Constant Current Discharge (Amperes) at 25°C (77°F)															
F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	4.19	3.22	2.67	2.30	1.78	1.31	1.11	0.65	0.51	0.42	0.339	0.295	0.237	0.198	0.109
1.80V/cell	5.62	4.11	3.22	2.72	2.10	1.53	1.24	0.71	0.55	0.44	0.364	0.316	0.252	0.205	0.110
1.75V/cell	6.34	4.52	3.52	2.93	2.18	1.58	1.30	0.74	0.56	0.45	0.374	0.325	0.256	0.210	0.111
1.70V/cell	6.98	4.92	3.75	3.08	2.27	1.65	1.34	0.76	0.58	0.47	0.383	0.331	0.260	0.214	0.113
1.65V/cell	7.70	5.31	3.99	3.27	2.40	1.69	1.37	0.77	0.60	0.49	0.394	0.339	0.264	0.219	0.115
1.60V/cell	8.49	5.77	4.27	3.48	2.53	1.76	1.38	0.80	0.62	0.50	0.407	0.346	0.267	0.221	0.115

Constant Power Discharge (Watts) at 25°C (77°F)															
F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	7.66	5.94	4.97	4.34	3.40	2.52	2.13	1.27	1.00	0.81	0.666	0.579	0.469	0.393	0.216
1.80V/cell	10.17	7.50	5.93	5.06	3.95	2.91	2.38	1.38	1.07	0.86	0.711	0.619	0.496	0.404	0.218
1.75V/cell	11.23	8.11	6.40	5.39	4.06	2.99	2.48	1.42	1.08	0.88	0.727	0.633	0.503	0.415	0.219
1.70V/cell	12.02	8.64	6.73	5.62	4.20	3.10	2.55	1.46	1.11	0.90	0.744	0.646	0.510	0.423	0.223
1.65V/cell	13.07	9.24	7.10	5.93	4.40	3.15	2.59	1.47	1.15	0.93	0.762	0.658	0.517	0.431	0.226
1.60V/cell	14.08	9.81	7.47	6.25	4.61	3.26	2.60	1.52	1.18	0.96	0.785	0.670	0.521	0.435	0.227


UP2.2-12

Dimensions


T1 Terminal
Unit: mm [inches]

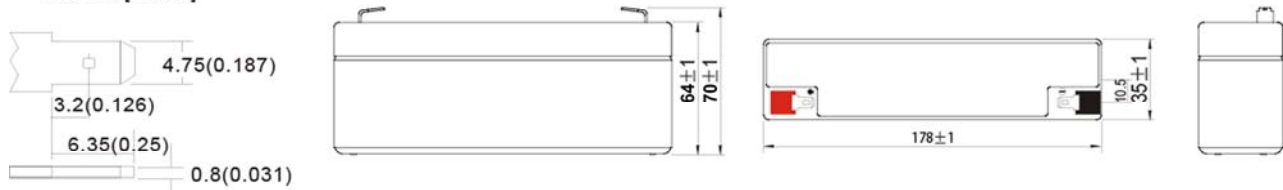


Discharge Characteristics

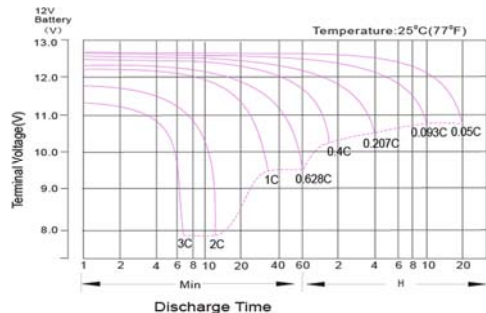


Effect of Temperature on Long Term Float Life

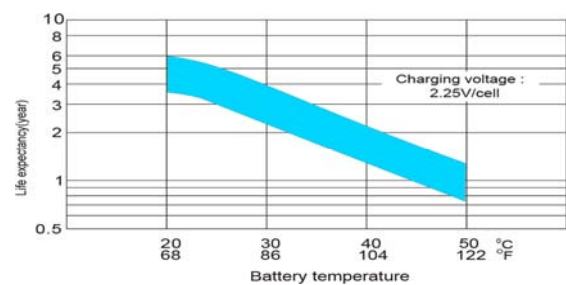


Float Charging Characteristics

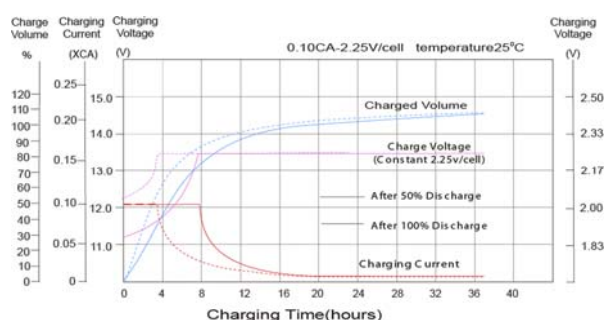

Cycle Life in Relation to Depth of Discharge

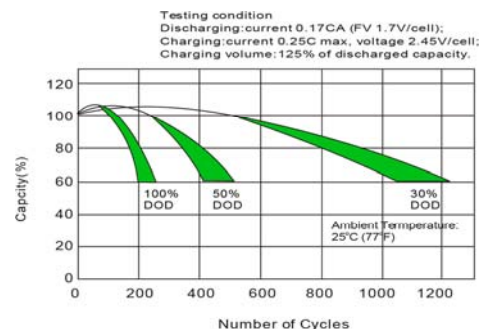

Temperature Effects in Relation to Battery Capacity

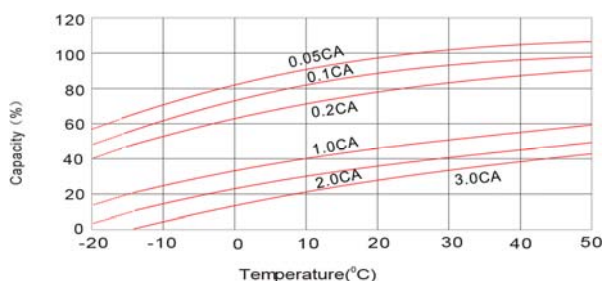

Self Discharge Characteristics

