

# MSMD200M3-18

200W Mono-Crystalline Solar Module




Manufacturer of high quality module



Engineering drawing

Unit:mm

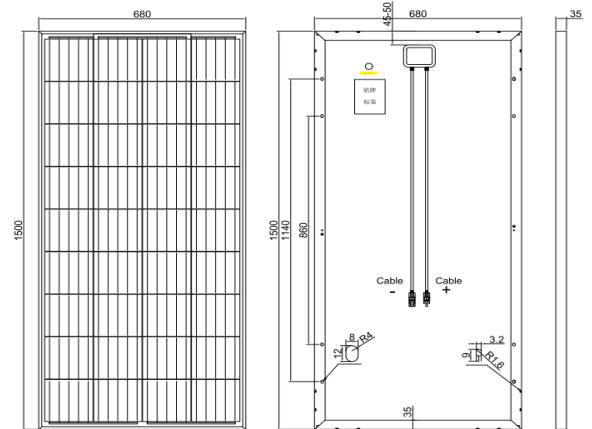

Key Features



Plus power tolerance: +3%



Independent research anti-reflective and self-cleaning glass surface reduces power loss from dirt and dust



Excellent performance under low light environments, create better kWh/kW ratio and produce average 2-3% more electricity



Best Quality



Junction box and bypass diodes guarantee the modules free of overheating and "hot spot effect"



100% EL double-inspection ensures modules are defects free



Mechanical characteristics

Cell Type	Mono-crystalline 158.75mm
Number of cells	36 pcs (4x9)
Module Dimensions	1500x680x35 mm
Module weight	11.7 kg
Front Glass	3.2mm Low iron tempered glass
Frame	Anodized aluminum alloy
Connector	MC4 PLUG
Output Cables	S=2.5mm <sup>2</sup> /L=900mm
Junction box	IP67 with bypass-diode
Fire Safety Class	Class C (IEC61730)



Electrical Performance

Module Type	MSMD200M3-18	
Power output	200W	
Power output tolerances	%	0~+3
Module efficiency	%	19.6
Voltage at Pmax	V	20.27
Current at Pmax	A	9.87
Open circuit voltage	V	25.0
Short circuit current	A	10.39
Cells efficiency	%	22.2%
Operating temperature	°C	- 40 ~ + 85



Thermal characteristics

Nominal operating cell temperature	°C	45 ± 2
Temperature coefficient of Pmax	% / K	-0.35
Temperature coefficient of Voc	% / K	-0.29
Temperature coefficient of Isc	% / K	+0.049



Electrical characteristics

