

FLOODED DEEP CYCLE BATTERY

12 LC 185-HC



Series	LC	Warranty	1 Year
Volts	12	BCI	921
Cells	6	Plates/Cell	9
Terminal Type	DT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18 x 1-1/2"		

Charge

Charge Voltage Range	14.7-15 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -17°C	648
Marine Crank Amps (MCA) 32°F / 0°C	810
Reserve Capacity (RC @ 25A)	406 Minutes
Reserve Capacity (RC @ 75A)	107 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 5 Hour Rate	162 Ah	32.4 A
@ 10 Hour Rate	180 Ah	18.0 A
@ 20 Hour Rate	250 Ah	12.5 A

Amphère hour capacity ratings based on specific gravity of 1.280. Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications




Weight	61 kg	134.5 lbs
Length	391 mm	15.38"
Width	178 mm	7"
Height Inc. Term.	365 mm	14.38"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Container	ABS
Cover	ABS
Handles	Rope / Plastic Handle

Cycle Life vs. Depth of Discharge

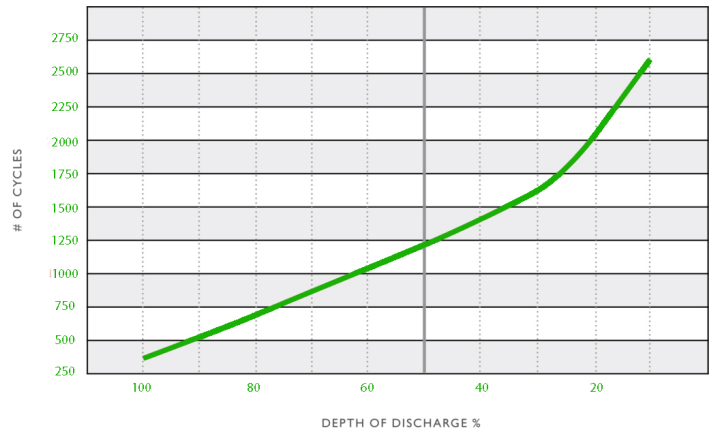

Voltage vs. Depth of Discharge

