

FLOODED DEEP CYCLE BATTERY

12 LC GC-HC



Series	LC	Warranty	1 Year
Volts	12	BCI	GC12
Cells	6		11
Terminal Type	UTL		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18 x 1-1/2"		

Charge

Charge Voltage Range	14.7-15 V/cell @ 25°C (77°F)		
Self-Discharge Rate	5%-10% per month at 25°C (77°F)		

Capacity

Cold Crank Amps (CCA) 0°F / -17°C	563		
Marine Crank Amps (MCA) 32°F / 0°C	703		
Reserve Capacity (RC @ 25A)	284 Minutes		
Reserve Capacity (RC @ 75A)	79 Minutes		

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 5 Hour Rate	119 Ah	23.8 A
@ 10 Hour Rate	132 Ah	13.2 A
@ 20 Hour Rate	150 Ah	7.5 A

Amphère hour capacity ratings based on specific gravity of 1.280. Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications




Weight	37.5 kg	82.5 lbs
Length	333 mm	13.13"
Width	182 mm	7.17"
Height Inc. Term.	274 mm	10.8"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Container	ABS
Cover	ABS
Handles	Top Molded Strap Brackets

Cycle Life vs. Depth of Discharge

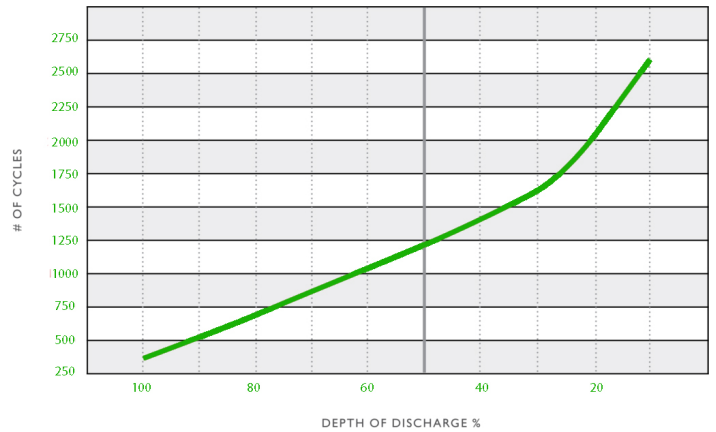

Voltage vs. Depth of Discharge

