

UP Series SP067

SOLAR POWER OPEN




Product Design Features

- Maintenance free product (SMF).
- Power Supply & Starting power suitable.
- More than 300 cycles at 75% D.O.D.
- More than 800 cycles IEC 61427.
- High resistance to deep and repetitive discharge cycles.
- Internal gas recombination efficiency 98%-99%.
- One-way valve regulated system with flame-arrestor.
- Delivered ready for use at 100% of its nominal capacity.
- Long Service Life.

Specifications

| | | |
|-----------------------|-------------------|---------------------|
| Nominal Voltage (V) | 12 | |
| Nominal Capacity (Ah) | C20 | 60 |
| | C100 | 70 |
| Electrolyte density | 1.290 ± 0.015g/ml | |
| Dimension | Length | 242 mm (9.5 inches) |
| | Width | 175 mm (6.8 inches) |
| | Height | 190 mm (7.4 inches) |
| Approx. Weight (kg) | 14.9 | |
| Terminals | Standard cone | |
| Handles | Yes (2) | |
| QTY / PLT / Layer | 63 / 1 / 3 | |

Battery Layout

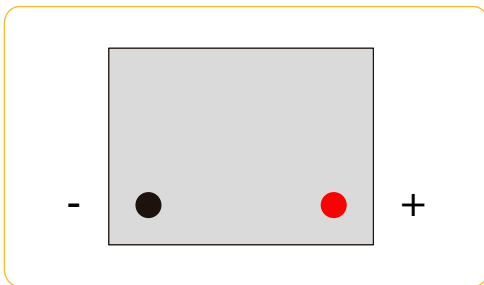

Certification



Capacity vs Operating Temperature

