

07OPzS0490

(2V 560Ah @ 10hr)

Eternity Technologies vented lead-acid batteries for the standby power market. Eternity Technologies OPzS batteries have optimised design resulting in a low maintenance, reliable energy storage solution for critical and unstable conditions.

Performance characteristics

Nominal Voltage	2V
Number of cells	1
Design Life	20 years
Nominal Capacity 20°C (68°F)	
10 hour rate (56A, 1.8V)	560Ah
5 hour rate (100A, 1.75V)	501.5Ah
1 hour rate (304A, 1.6V)	304Ah
Internal Resistance	
Fully Charged Battery 20°C (68°F)	0.5mOhm
Electrolyte	
Nominal S.G at 20°C = 1.240kg/l	
Operating Temperature Range	
	-20°C to +55°C
Maximum Discharge Current 20°C (68°F)	
	714A
Charge Methods: Constant Voltage Charge 20°C (68°F)	
Cycle use	2.40V (time limited)
Maximum charging current	224A
Standby use	2.25V ± 1%
Temperature compensation	-3.0mV/°C/Cell
Terminal torque	23Nm

Discharge Constant Current (Amperes at 20°C)

Cells (V)	10 m	15 m	30 m	1 h	2 h	3 h	5 h	8 h	10 h
1.60	646.6	580.1	446.9	304.3	200.8	154.3	102.0	71.1	58.9
1.65	579.0	527.2	417.4	295.8	197.6	151.1	103.0	71.1	58.9
1.70	510.3	471.2	384.6	284.2	193.4	147.9	102.5	71.1	58.9
1.75	439.5	412.1	346.6	266.3	186.0	143.7	100.3	69.4	57.7
1.80	365.6	348.7	303.2	242.0	173.3	137.4	95.7	67.2	56.0
1.83	320.2	307.5	271.5	220.8	162.7	130.0	92.0	65.5	54.6
1.85	289.5	280.0	250.4	207.1	155.3	124.7	89.6	64.5	53.8
1.87	258.9	249.4	225.1	189.1	143.7	117.3	85.2	61.5	51.2
1.90	211.3	203.9	187.0	161.7	127.8	107.8	78.4	57.2	47.7

Discharge Constant Power (Watts at 20°C)

Cells (V)	10 m	15 m	30 m	1 h	2 h	3 h	5 h	8 h	10 h
1.60	1061.9	961.5	760.8	537.8	367.7	287.4	195.5	137.4	114.1
1.65	973.1	892.8	721.7	528.3	364.5	283.2	195.5	137.4	114.1
1.70	880.2	816.8	677.3	512.5	358.2	277.9	195.5	137.4	114.1
1.75	776.6	732.2	623.4	487.1	346.6	270.5	191.2	134.2	112.0
1.80	663.5	635.0	555.8	448.0	326.5	259.9	183.8	130.0	108.8
1.83	588.5	566.3	504.0	414.2	307.5	247.2	177.5	127.8	106.7
1.85	538.9	522.0	469.1	390.9	294.8	237.7	174.3	125.7	105.3
1.87	483.9	469.1	423.7	359.2	275.8	226.1	165.9	120.5	100.8
1.90	402.6	389.9	357.1	311.7	247.2	209.2	154.3	113.1	94.1



N Part of our Network Power range

Features

- High energy density

- Robust tubular positive electrode design, compliant with DIN 40736

- Minimal maintenance due to low antimony alloy and large electrolyte volume

- Operating temperature -20°C to +55°C

- EUROBAT design life: Long Life > 12 years

- Fully recyclable with low CO₂ footprint

Applications

- Telecommunications/ Mobile Phone Stations

- Traffic Systems


- UPS Systems

- Emergency Lighting

- Electrical Switching


Dimensions and weight

Length	168 mm
Width	208 mm
Height (H1)	483.5 mm
Total height (H2)	509 mm
Dry weight	26.7 kg
Filled weight	36.9 kg




Compliant with IEC60896-11


Capacity factor vs. Temperature - discharge current I_{10}

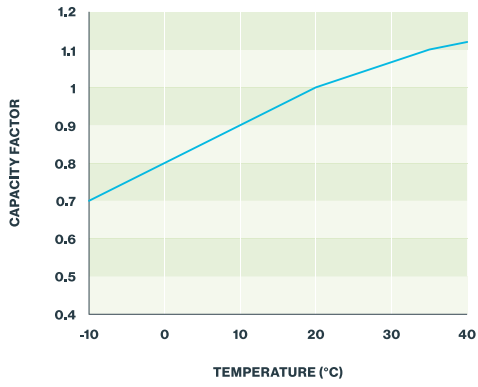

Service life vs. Temperature

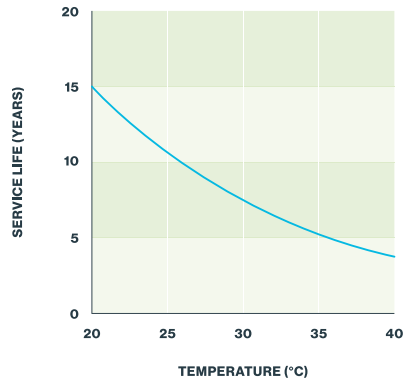

Charging voltage vs. Temperature

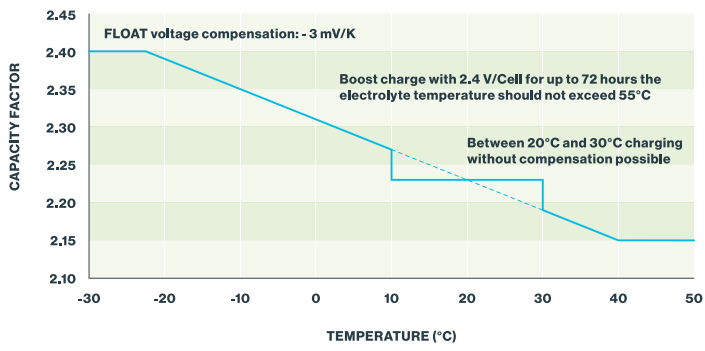

Self discharge

