

FLOODED DEEP CYCLE BATTERY

6 LC 145



Series	LC	Warranty	1 Year
Volts	6	BCI	GC2H
Cells	3	Plates/Cell	17
Terminal Type	DT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18 x 1-1/2"		

Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)		
Float Voltage Range	2.25 V/cell @ 25°C (77°F)		
Self-Discharge Rate	5%-10% per month at 25°C (77°F)		

Capacity

Cold Crank Amps (CCA) 0°F / -17°C	710
Marine Crank Amps (MCA) 32°F / 0°C	888
Reserve Capacity (RC @ 25A)	524 Minutes
Reserve Capacity (RC @ 75A)	144 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 5 Hour Rate	194 Ah	38.8 A
@ 10 Hour Rate	216 Ah	21.6 A
@ 20 Hour Rate	245 Ah	12.25 A

Amphère hour capacity ratings based on specific gravity of 1.280. Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications




Weight	32.0 kg	70.5 lbs
Length	259 mm	10.19"
Width	181 mm	7.13"
Height Inc. Term.	290 mm	11"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	44 mm	1.75"
Container	Polypropylene	
Cover	Polypropylene	
Handles	Top Molded Strap Brackets	

Cycle Life vs. Depth of Discharge

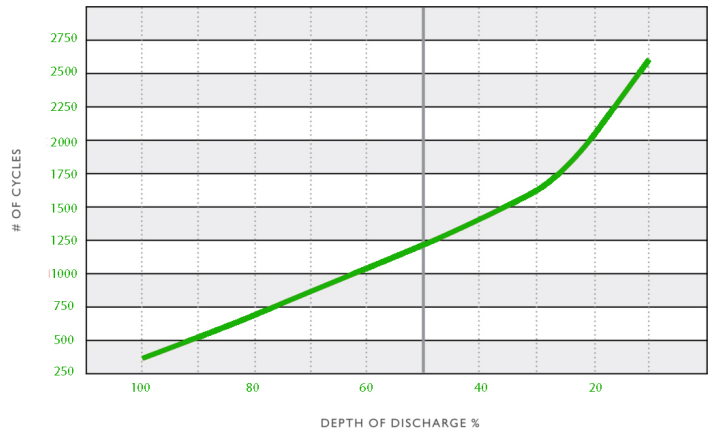

Voltage vs. Depth of Discharge

